

5700MSC-IP

IP Network Grand Master Clock & Video Master Clock System



The 5700MSC-IP is an IP Network Grand Master Clock and a Video Master Sync Generator both referenced to GPS and/or GLONASS. The system features 2x GbE, 2x10GbE ports, 6x fully timeable sync outputs, 4x SDI outputs and a loop thru reference input. For those hybrid plants where LTC outputs and AES/analog audio test sets are required, an optional (+AUX) expansion module is available.

This combo IP Network Grand Master Clock and Master Sync Generator is ideal for timing today's IP-based video broadcast, production and distribution facilities. It provides all the future timing needs of an IP-based plant while providing precision reference to any baseband SDI/Analog systems.

The test generator option(s) provide several test sets which are available on the 4x SDI (SD/HD/3Gbps) outputs as well as over the 10GbE IP outputs (10GbE SFP's are optional). There are 10x independent test signal generators when a test generator option is ordered, any can be routed to the 10GbE outputs, or the SDI outputs (4 generators may be combined to form a 4K signal generator).

As for IP timing formats, the 5700MSC-IP has been designed to be enterprise class, handling all current IP timing needs with the horsepower to address the future. It supports NTP, PTP-IEEE1588, MASTER PCR, AVB-IEEE802.1AS, AES67 profile, and SMPTE 2059-2. IP networking for live production and broadcast environments have very specific needs and requirements that typically involve deterministic flows, high bandwidth, and an SDN-based network design. The 5700MSC-IP can be used to design a robust, safe and

deterministic timing system for any IP Network or Hybrid IP/Baseband Video system. The product has been designed to handle timing requirements of several thousands of PTP clients. The 5700MSC-IP has 2x 10 GbE ports as well as two GbE ports that can be configured to provide and distribute any of the timing protocols described above.

This 5700MSC-IP is delivered with a GNSS head (GPS and GLONASS capable) complete with a 50ft cable for remote mounting (100ft, 400ft and fiber optic extension options are available for longer cable lengths).

A high stability, temperature-controlled oscillator provides the 5700MSC-IP with better than 1.0×10^{-8} (or 0.01ppm) frequency reference. The free running drift of this 10MHz reference will be less than 0.1Hz (which amounts to less than one millisecond time drift per day). This guarantees that any frequency drift, with time and temperature, will be within the tolerances expected from the best SPGs or master clocks available in the industry. Note that the provided GNSS antenna is required for PTP, AVB PCR, or 2059-2 timing protocols to be hosted by the system.


The SPG section of the 5700MSC-IP provides six independent timeable reference outputs. These six sync outputs may be configured to provide independently timed color black (black burst) outputs, independently timed HDTV tri-level sync outputs, 10Mhz outputs, word clock, and various available pulses.

It is available with a main processing board and optional redundant power supply.

Features & Benefits

- Modular 1RU design
- IP Network Grand Master Clock for NTP, PTP-IEEE1588, MASTER PCR, AVB-IEEE802.1AS, and SMPTE 2059-2
- 2x 1000BaseT RJ-45 ports
- 2x 10GbE ports (SFP's are not provided and are optional)
- 6x independently timeable sync outputs
- 4x optional SDI test generator outputs with the +SDI-TG option (supports SD/HD/3Gbps SDI)
- Optional 10GbE video test generator support with the +10G-TG option (SFP's are not included)
- Configurable to run in Boundary Clock mode for larger enterprise scale network designs (with an upstream 5700MSC-IP Grand Master Clock)
- GNSS (GPS and/or GLONASS) referenced system — outdoor antenna and 50ft cable provided
- Optional 100ft, 400ft and fiber optic extenders available for GNSS antenna
- All active components are front panel extractable & serviceable
- Optional dual power supply for redundancy (+2PS option)
- Full featured front panel control interface
- Contact closure output for critical warning
- VistaLINK® control for device configuration and status monitoring
- Multi System GPS referenced designs will be in sync and timed
- An optional expansion module (+AUX option) provides AES and analog audio test generator, LTC, DARS and GPIO functionality

Rear Panel View

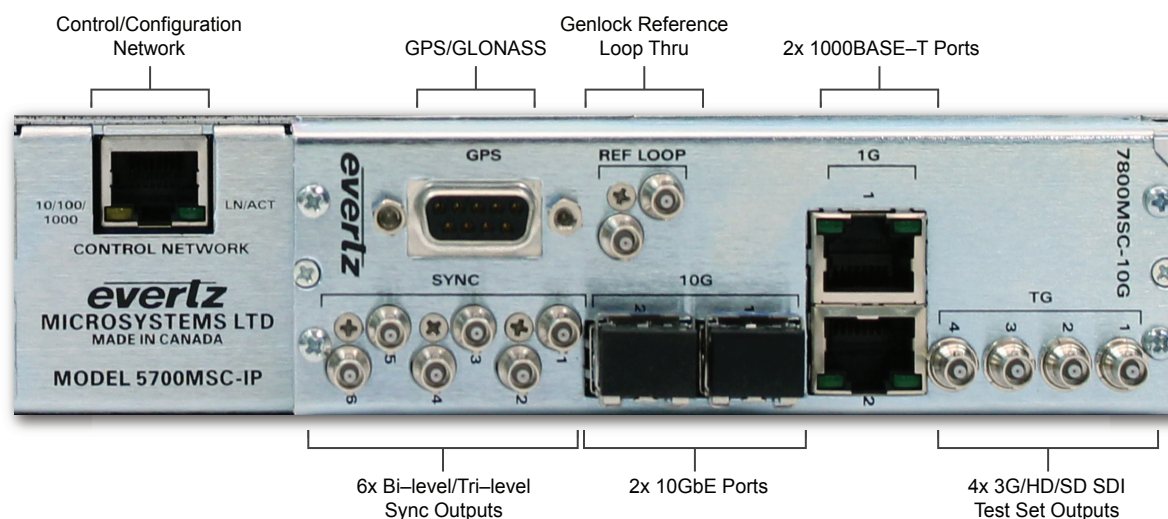


►5700MSC-IP Specifications

Analog Sync Outputs:		Timing:	NTP, PCR AVB (IEEE802.1AS) IEEE1588 (annex J) SMPTE 2059-2 AES67	SMPTE ST 372 dual link, and SMPTE ST 424 SMPTE ST 259-C (270Mb/s), SMPTE ST 292-1 4:2:2, SMPTE ST 372 dual link, and SMPTE ST 424 Quad link SMPTE ST 292-1 4:2:2 Quad link SMPTE ST 424 4:2:2 SMPTE ST 425-3 Dual link 3Gb/s SMPTE ST 425-5 Quad link 3Gb/s
Output Standards:				
Black Burst:	SMPTE ST 170 (NTSC-M), ITU-R BT.1700-1 (PAL-B)			
Bi-Level:	Slo-Pal 625i/48, 625i/47.95, 480p/59.94			
HD Tri-Level:	SMPTE ST 274 (1080p/23.98, 1080p/24, 1080i/50, 1080i/59.94, 1080i/60, 1080p/23.98sF, 1080p/24sF, 1080p/25, 1080p/29.97, 1080p/30, 1080p/50, 1080p/59.94, 1080p/60), SMPTE ST 296 (720p/59.94, 720p/60, 720p/50, 720p/30, 720p/24)	10GbE Timing Network:		
		Quantity:	2	
		Network Type:	IEEE 802.3ae (10GbE)	
		Connector:	SFP (SFP not included), LC/UPC	
		Timing:	NTP, PCR	Number of Outputs:
				4
Pulse Signals:	PAL color frame, 1Hz pulse, IRIG DATUM 1/1.001Hz pulse, 6/1.001Hz pulse	Genlock Input (Video/10MHz selectable):		Embedded Audio:
CW Signals:	5MHz, 10MHz, NTSC-M Subcarrier, PAL-B Subcarrier	Type:	Autodetects standard SMPTE ST 170 (NTSC-M), ITU-R BT.1700-1 (PAL-B), Color Black 1V p-p with optional VITC and 10-field pulse HD Tri-level Sync (same HD standards as sync outputs)	Up to 4x audio groups as specified in SMPTE ST 299-1 or SMPTE ST 272 Selectable tone frequencies (from 20Hz to 12kHz) and audio group 75Ω HD-BNC
Wordclock:	48KHz Wordclock			800mV nominal drive 0V ±0.5V
10MHz Output:	Level 5V CMOS (1kΩ) or ±1V (75Ω) 1.0V p-p, 2.0V p-p, in 75Ω, SNR > 70dB rms SFDR > 50dBc 75Ω HD-BNC	Number of Inputs:	2 Loop-thru High impedance, isolated, differential external termination required 75Ω HD-BNC	Rise and Fall Time:
				100ps HD/3G, 600ps SD
Connector:		Connector:		Overshoot:
Number of Outputs:	6	Return Loss:	>40dB to 10MHz (with external 75Ω termination)	< 10% of amplitude
DC Offset:	0V ±0.05V			Jitter:
Return Loss:	> 40dB up to 10MHz	Input Level Range:		< 0.2 UI
SNR:	> 75dB rms	Video:	-3.5dB (double-terminated) to +6dB (un-terminated)	Return Loss:
Output Levels:	1.0V p-p, 2.0V p-p, in 75Ω, selectable	10MHz:	0.3V p-p to 4.0V	> 15dB to 1.5GHz > 10dB to 3GHz
		Frequency Lock Range:		
		Wide mode:	±15ppm min	Electrical:
		Narrow mode:	±0.1ppm min	Voltage:
GPS/GLONASS Receiver:		SDI Test Generators		Auto-ranging 100 to 240V AC, 50/60Hz
Temperature:	-40°C to +70°C	(with +SDI-TG, or +10G-TG Option):		Configuration:
Humidity:	95% R.H. Condensing at 60°C	Standards:	SMPTE ST 259-C (270Mb/s), SMPTE ST 292-1 4:2:2,	Optional redundant supply available 125W (all options installed) TÜV Listed Complies with EU safety directives Complies with FCC Part 15 Class A Complies with EU EMC Directive
1000BASE-T Timing Network:				Power:
Quantity:	2			Safety:
Network Type:	IEEE 802.3 (10BASE-T) IEEE 802.3u (100BASE-TX) IEEE 802.3ab (1000BASE-T)			EMI/RFI:
Connector:	RJ-45			
				Physical:
				Dimensions:
				19" W x 1.75" H x 11.5" D (483mm W x 45mm H x 292mm D)
				Weight:
				8lbs (3.5kg)

►+AUX Expansion Module Option (AES & Analog Audio Test Set, DARS, GPIO and LTC)

LTC Outputs:		Balanced:	AES3 (24-bit) (4V p-p 110Ω terminated)	Output Impedance:	66Ω
Standard:	SMPTE ST 12-2 or IRIG-B			Signal Level:	-30 to +10dBu into 10kΩ load
Frame Rate:	24, 25, 30 and 29.97 (drop frame and non-drop frame)	Number of Outputs:		DC Offset:	< 10mV
Number of outputs:	2x balanced	DARS:	1 unbalanced, 1 balanced	Noise floor:	< -90dBu, unweighted
Connectors:	Female high density DB-15	AES Test Gen:	2 unbalanced, 2 balanced	THD+N:	< -100dB with 1kHz @ +10dBu into 10kΩ load
Level:		Connector:			
Un-powered:	Adjustable, 1.0-8.0V p-p, balanced	Unbalanced:	75Ω HD-BNC	General Purpose Inputs and Output:	
Powered:	2V p-p with 11V DC offset to drive downstream 1200 series slave clocks on LTC1 only	Balanced:	Removable Terminal Strip	Number of Inputs:	2
		Sampling Rate:	48kHz	Number of Outputs:	2 (function menu selectable)
Output Impedance:	44Ω balanced (un-powered)	Impedance:		Output Type:	Opto-isolated, active closure to GND, 20kΩ pull-ups to +5V Opto-isolated, senses closure to GND, pull-ups to +5V
Rise Time:	40 ±10μs	Unbalanced:	75Ω unbalanced	Input Type:	
Jitter:	< 2μs	Balanced:	110Ω balanced		
		AES Tones:	Menu selectable	Connector:	4 pins plus 2 ground pins on DB-15 female
DARS & AES Test Generator Outputs:		Analog Audio Tone Generator:			
Standard:		Number of Outputs:	2		
Unbalanced:	SMPTE ST 276-1 single-ended AES (24-bit) (1V p-p into 75Ω)	Type:	Balanced analog audio		
		Connector:	6 pins on 16-pin removable terminal strips		

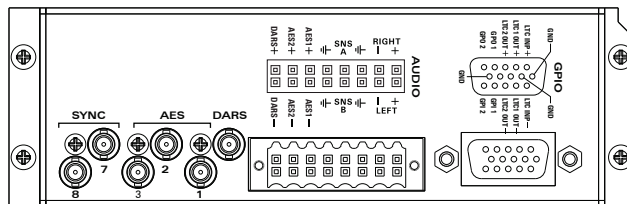

►Ordering Information

5700MSC-IP	IP Network Grand Master Clock & Video Master Clock System (includes GPS/GLONASS receiver antenna & 50ft cable, loop thru genlock, IEEE 1588, 2x 1000GbE ports, 6x sync outputs, 2x10GbE ports (10GbE SFP's not included) and 1x power supply)
-------------------	--

Ordering Options:

+2PS
+SDI-TG
+10G-TG

Redundant Power Supply
4x outputs, configurable SD/HD/3G SDI Test/black generators
Test Generator outputs over 10GbE Ports and 4x SDI outputs,
configurable SD/HD/3G SDI Test/black generators
(* includes +SDI-TG option)
Includes expansion test module which provides AES and
Analog audio test generator, DARS, GPIO, and LTC outputs

SFP Options:

+SFP10G-TR13-A 1310nm laser, standard sensitivity 1310nm optical
transceiver, 10km, single mode

+AUX